


THREADED ACCESSORIES



Fig. 15 & 15L MACHINE THREAD HANGER ROD

Fig. 15 RIGHT-HAND THREADS
Fig. 15L RIGHT- AND LEFT-HAND
THREADS

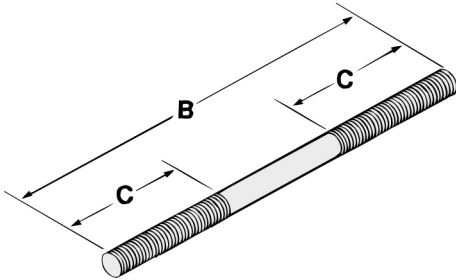

FUNCTION: Designed for use in pipe hanger assembly.

MATERIAL: Low carbon steel

FINISH: Plain

ORDERING: Specify rod size, length (B) and figure number.

Rod Size	Thread Length C	Max. Rec. Load/lbs.		Wt. Per Inch/lbs.
		650°F	750°F	
$\frac{3}{8} \times B$	2½	730	540	.03
$\frac{1}{2} \times B$	2½	1350	1010	.06
$\frac{5}{8} \times B$	2½	1810	1610	.09
$\frac{3}{4} \times B$	3	2710	2420	.13
$\frac{7}{8} \times B$	3½	3770	3360	.17
1 x B	4	4960	4420	.22

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number.

Price on request.