


THREADED ACCESSORIES



Fig. 35 & 35L WELDLESS EYE NUT

Fig. 35 RIGHT-HAND THREADS
Fig. 35L LEFT-HAND THREADS

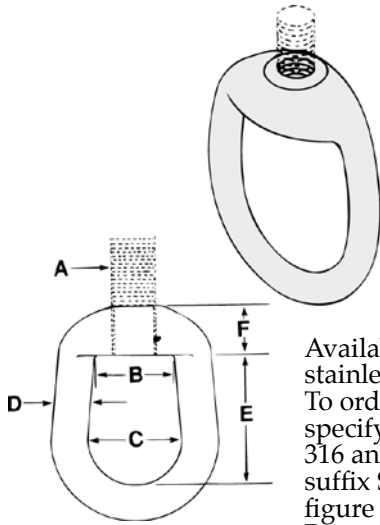

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number. Price on request.

MATERIAL: Forged steel

FINISH: Plain

FUNCTION: Designed for use in high strength and high temperature piping applications. Fig. 35L is designed to be used in conjunction with Fig. 960 forged steel turnbuckle, in applications where a vertical adjustment may be necessary.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 17) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 17).

ORDERING: Specify rod size and figure number.

Rod Size A	B	C	D	E	F	Max. Rec. Load/lbs.		Wt. Each (in lbs.)
						650°F	750°F	
3/8	1 1/4	1 1/2	1/2	2	11/16	730	540	.64
1/2	1 1/4	1 1/2	1/2	2	11/16	1350	1010	.61
5/8	1 1/4	1 1/2	1/2	2	11/16	1810	1610	.59
3/4	1 1/4	1 1/2	1/2	2	11/16	2710	2420	.57
7/8	1 11/16	2	3/4	2 5/8	1	3770	3360	1.67
1	1 11/16	2	3/4	2 5/8	1	4960	4420	1.65
1 1/8	2 1/4	2 1/2	1	3 3/8	1 1/4	6230	5560	3.68
1 1/4	2 1/4	2 1/2	1	3 3/8	1 1/4	8000	7140	3.57
1 1/2	2 1/4	2 1/2	1	3 3/8	1 1/4	11630	10370	3.43

Note: Supports loads equal to the full limitation of the hanger rod.