

THREADED ACCESSORIES




FUNCTION: Designed to provide a vertical adjustment after pipe or tube is in place. Fig. 44 is regularly used in conjunction with Fig. 500 split ring hanger. Figure 44C is regularly used in conjunction with Fig. 502 split ring hanger.

APPROVALS: Complies with Federal Specifications A-A-1192A (Type 15) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 15).

MATERIALS: Malleable Iron

ORDERING: Specify rod size and figure number.

**Fig. 44
TURNBUCKLE
ADJUSTER**

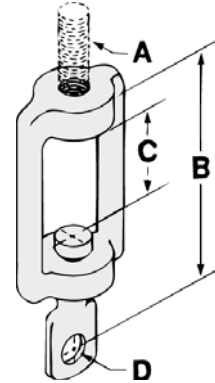

Rod Size A	For Pipe Sizes	B	C	D	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/4	3/8	2 1/2	1 1/4	7/32	230	.09
3/8	1/2 to 2	3 13/16	1 7/8	13/32	610	.28
1/2	2 1/2 to 3 1/2	3 13/16	1 13/16	13/32	710	.31
5/8	4 to 5	4 7/8	2 5/16	1/2	710	.72
3/4	6	4 15/16	2 5/16	9/16	860	.70