


THREADED ACCESSORIES



Fig. 47 CONCRETE ANCHORS

Fig. 47D SELF DRILLING
SNAP-OFF FLUSH




FUNCTION: Designed to function as a drill, drilling its own hole and as an anchor. The tapered chuck end of the anchor is attached to an air hammer, then after drilling is complete, the tapered end snaps off leaving the anchor flush with the wall. Useful when a large number of anchors are to be installed.

MATERIAL: Case hardened steel

FINISH: Electro-galvanized

Rod Size	O.D.	Thread Depth	Hole Depth	Wt. Each (in lbs.)
3/8	9/16	9/16	1 ¹⁷ / ₃₂	.10
1/2	1 ¹ / ₁₆	1 ³ / ₁₆	2 ¹ / ₃₂	.18
5/8	2 ⁷ / ₃₂	1 ⁵ / ₁₆	2 ¹⁵ / ₃₂	.36

Fig. 47S STEEL DROP-IN



FUNCTION: Designed to be inserted into a pre-drilled hole and set into place by means of a setting tool.


MATERIAL: Low carbon steel

FINISH: Electro-galvanized

ORDERING: Specify rod size and figure number.

Rod Size	Hole Size	Anchor Length	Thread Length	Wt. Each (in lbs.)
3/8	1/2	1 ⁹ / ₁₆	5/8	.07
1/2	5/8	2	3/4	.13
5/8	3/4	2 ¹ / ₂	1	.28

Fig. 47W WEDGE

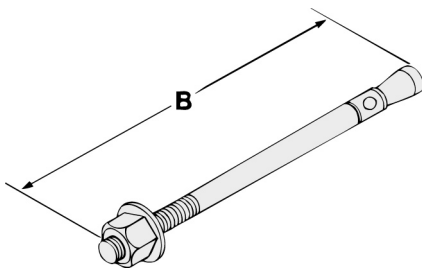

FUNCTION: Designed to be driven into a pre-drilled hole. The expansion of the case is controlled by the tightening of the nut, this eliminates the need for an exact hole size. Useful in applications where a high resistance to vibratory loads is desired.

MATERIAL: Low carbon steel

FINISH: Electro-galvanized

Rod Size	Thread Length	Minimum Embedment	Wt. Per Inch/lbs.
3/8 X B	1 ¹ / ₈	1 ⁵ / ₈	.03
1/2 X B	1 ¹ / ₄	2 ¹ / ₄	.06
5/8 X B	1 ¹ / ₂	2 ³ / ₄	.11