

# THREADED ACCESSORIES




**Fig. 70**  
**ANCHOR BOLT**

**FUNCTION:** Designed to be embedded in concrete to provide a means for fastening devices from concrete surfaces.

**MATERIAL:** Low carbon steel

**FINISH:** Plain

**ORDERING:** Specify rod size, length and figure number.

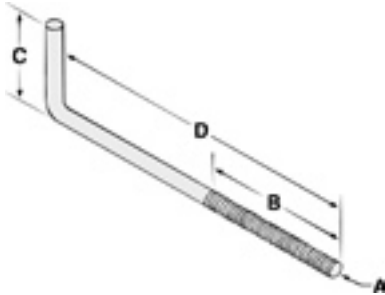

Rod Size A	Thread Length B	C	Wt. Each (in lbs.)			
			Length D (inches)			
			6	8	10	12
$\frac{3}{8}$	2	2	.28	.34	.40	.46
$\frac{1}{2}$	2	2	.52	.63	.74	.85
$\frac{5}{8}$	2 $\frac{1}{2}$	2 $\frac{1}{2}$	.81	.99	1.16	1.34
$\frac{3}{4}$	2 $\frac{1}{2}$	2 $\frac{3}{4}$	1.19	1.44	1.69	1.94
$\frac{7}{8}$	2 $\frac{1}{2}$	3	1.69	2.00	2.39	2.70
1	3	3 $\frac{1}{2}$	2.50	3.00	3.47	4.30

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number.

Price on request.