

# THREADED ACCESSORIES



**FUNCTION:** Designed for use as a support, anchor, or guide for various types of pipe. The PVC coating on Fig. 93 protects the surface of the pipe from contact with the metal surface of the U-Bolt.

**APPROVALS:** Complies with Federal Specifications A-A-1192A (Type 24) and Manufacturers' Standardization Society ANSI/SP- 69 and SP-58 (Type 24).

**MATERIAL:** Low carbon steel

**ORDERING:** Specify pipe size and figure number.

## Fig. 90, 91, 93 & 94 STANDARD U-BOLT

- Fig. 90 PLAIN
- Fig. 91 ELECTRO-GALVANIZED
- Fig. 93 PVC COATED
- Fig. 94 STAINLESS STEEL

Pipe Size	Rod Size A	B	C	D	Tangent E	Max. Rec. Load/lbs.		Wt. Each (in lbs.)
						650°F	750°F	
1/2	1/4	15/16	1 3/16	2 1/8	2 3/4	485	435	.11
3/4	1/4	1 1/8	1 3/8	2 1/8	2 3/4	485	435	.12
1	1/4	1 3/8	1 5/8	2 1/8	2 3/4	485	435	.12
1 1/4	3/8	1 11/16	2 1/16	2 1/8	2 7/8	1220	1090	.28
1 1/2	3/8	2	2 3/8	2 1/2	3	1220	1090	.30
2	3/8	2 7/16	2 13/16	2 1/2	3 1/4	1220	1090	.33
2 1/2	1/2	2 15/16	3 7/16	3	3 3/4	2260	2020	.73
3	1/2	3 9/16	4 1/16	3	4	2260	2020	.78
3 1/2	1/2	4 1/16	4 9/16	3	4 1/4	2260	2020	.84
4	1/2	4 9/16	5 1/16	3	4 1/2	2260	2020	.90
5	1/2	5 5/8	6 1/8	3	5	2260	2020	1.01
6	5/8	6 3/4	7 3/8	3 3/4	6 1/8	3620	3230	2.00
8	5/8	8 3/4	9 3/8	3 3/4	7 1/8	3620	3230	2.33
10	3/4	10 7/8	11 5/8	4	8 3/8	5420	4830	4.91
12	7/8	12 7/8	13 3/4	4 1/4	9 5/8	7540	6730	7.73
14	7/8	14 1/8	15	4 1/4	10 1/4	7540	6730	8.30
16	7/8	16 1/8	17	4 1/4	11 1/4	7540	6730	9.20
18	1	18 1/8	19 1/8	4 3/4	12 5/8	9920	8850	13.50
20	1	20 1/8	21 1/8	4 3/4	13 5/8	9920	8850	14.60
24	1	24 1/8	25 1/8	4 3/4	15 5/8	9920	8850	16.90
30	1	30 1/8	31 1/8	4 3/4	18 5/8	9920	8850	19.10
36	1	36 1/8	37 1/8	4 3/4	21 5/8	9920	8850	23.20

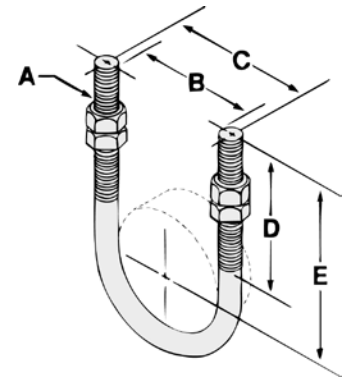


Fig. 90




Fig. 93

Fig. 90S special U-Bolts are available upon request. Please specify:

- Pipe Size
- Rod Size A
- Length of threads D
- Tangent E
- Finish
- Type of material if other than low carbon steel

## Fig. 90S SPECIAL U-BOLTS

