




www.phd-mfg.com

PIPE SUPPORTS

FIG. 877

PIPE SUPPORT ADJUSTER

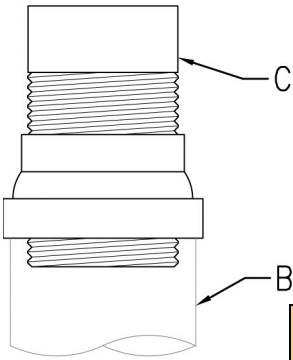

Function: Designed to provide up to 4 1/2" (114.3) of vertical adjustment after installation. Normally used in conjunction with Fig. 871 threaded base stand, Fig. 880 pipe saddle support or Fig. 882 pipe saddle support with U-bolt.

Material: Carbon steel with malleable iron reducer

Finish: Plain or electro-galvanized

Approvals: Complies with Federal Specification A-A-1192A (Type 38) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 38) which supersedes ANSI/MSS SP-69. (When used with Fig. 880 or Fig. 882)

Ordering: Specify figure number, pipe size, and finish.

Adjuster Size		For Pipe Size		B	C	Max. Adjustment		Wt. Each	
						lbs.	kg		
1 1/2	(38.10)	2 1/2 to 3 1/2	(65 to 90)	2 1/2	1 1/2	4 1/2	(114.30)	4.05	(1.84)
2 1/2	(63.50)	4 to 12	(100 to 300)	3	2 1/2	4 1/2	(114.30)	8.30	(3.76)
3	(76.20)	14 to 16	(350 to 400)	4	3	4 1/2	(114.30)	12.60	(5.72)
4	(101.60)	18 to 36	(450 to 900)	6	4	4 1/2	(114.30)	22.60	(10.25)

THREADED ACCESSORIES
 CPVC STRAPS
 BAND HANGERS
 BEAM CLAMPS
 CLEVIS HANGERS
 PIPE ROLLER SUPPORTS
 SPLIT RING HANGERS
 PIPE CLAMPS
 CENTER LOAD BEAM CLAMPS
 PIPE SHIELDS, INSULATION, & SADDLES
 PIPE GUIDES & SLIDES
 WALL BRACKETS
 PIPE SUPPORTS
 STRUCTURAL ATTACHMENTS
 SEISMIC BRACING