

FIG. 990

ADJUSTABLE IN-RACK FLUE HANGER

- Function:** Designed to be fully adjustable to fit typical 8" (203.2) , 10" (254), and 12" (304.8) flue spaces between common warehouse racking types such as teardrop.
- Size:** $\frac{3}{8}$ " rod
- Material:** Carbon steel
- Finish:** Electro-galvanized
- Install:** Loosen rod coupling so the device can expand. Place compressed product in the rack flue space. Expand device inserting the support rivets into rack columns. Once fully expanded, pull device down securing it into the rack columns ensuring spring clips snap in engaging the rack column. Adjust the rod coupling assembly to the desired position then tighten coupling 80 in.-lbs. (9.04 N-m). Then insert threaded rod until it fully engages into the rod coupling.
- Approvals:** Underwriters' Laboratories Listed in the U.S. (UL) and Canada (CUL).
- Ordering:** Specify figure number.


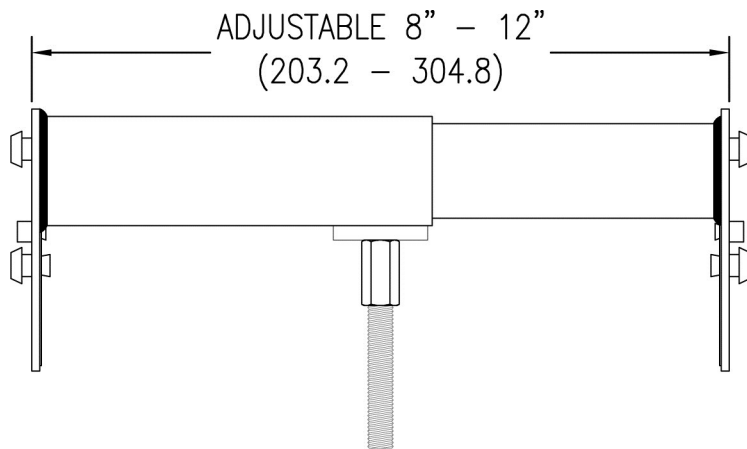


Fig. No.	Flue Space Length		Std. Package	Max. Rec. Load		Wt. Each	
				lbs.	kN	lbs.	kg
990	8 - 12	(203 - 305)	5	730	(3.25)	3.50	(1.59)






PHD Manufacturing, Inc.

44018 Columbiana-Waterford Road
 Columbiana, Ohio 44408-9481
 Phone: 800-321-2736 • 330-482-9256
 Fax: 330-482-2763
 Web: www.phd-mfg.com

FIG. 990 ADJUSTABLE IN-RACK FLUE HANGER

- Function:** Designed to be fully adjustable to fit typical 8", 10", and 12" flue spaces between common warehouse racking types such as teardrop.
- Size:** 3/8" Rod
- Flue Spaces:** 8" thru 12"
- Approvals:** Underwriters Laboratories listed for US and Canada
- Material:** Low Carbon Steel
- Installation:** Loosen rod coupling so the device can expand. Place compressed product in the rack flue space. Expand device inserting the support rivets into rack columns. Once fully expanded, pull device down securing it into the rack columns ensuring spring clips snap in engaging the rack column. Adjust the rod coupling assembly to the desired position then tighten coupling 80 in./lbs. Then insert threaded rod until it fully engages into the rod coupling.

Fig. Number	Flue Space Length	Std. Package	Max. Rec. Load		Wt. Each	
			lbs.	kN	Lbs.	kg
990	8 - 12 (203 - 305)	5	730	(3.25)	3.50	(1.59)

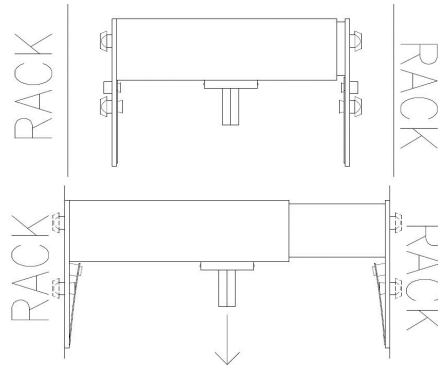

The Complete Line of Pipe Supports and Devices
 Pipe Hangers ▲ Strut & Accessories ▲ Pipe Clamps ▲ Beam Clamps ▲ Shields