

# THREADED ACCESSORIES




**Fig. 30**  
**EYE SOCKET**

**FUNCTION:** Designed for attaching hanger rod to various types of hanger attachments.

**APPROVALS:** Complies with Federal Specifications A-A-1192A (Type 16) and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 16).

**MATERIAL:** Malleable iron

**ORDERING:** Specify rod size and figure number.

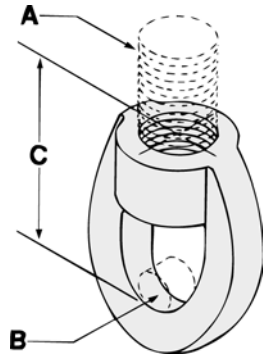

Rod Size A	For Pipe Sizes	Max. Bolt Size B	C	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
$\frac{1}{4}$	$\frac{3}{8}$	$\frac{1}{4}$	$1\frac{3}{8}$	240	.08
$\frac{3}{8}$	$\frac{1}{2}$ to 2	$\frac{1}{4}$	$1\frac{3}{8}$	610	.08
$\frac{1}{2}$	$2\frac{1}{2}$ to $3\frac{1}{2}$	$\frac{1}{4}$	$1\frac{9}{16}$	1000	.11
$\frac{5}{8}$	4 to 5	$\frac{3}{8}$	$1\frac{3}{4}$	1400	.22
$\frac{3}{4}$	6	$\frac{1}{2}$	$2\frac{1}{4}$	2200	.30
$\frac{7}{8}$	8 to 12	$\frac{1}{2}$	$2\frac{7}{16}$	2300	.32