


THREADED ACCESSORIES

FIG. 20 & 21

CONTINUOUS THREADED ROD

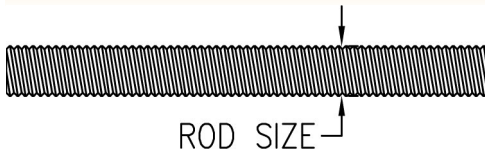

Function: Useful in applications where stud lengths cannot be predetermined.

Material: Carbon steel (Type 304 or 316 Stainless Steel upon request)

Finish: Plain (**Fig. 20**) or electro-galvanized Finish (**Fig. 21**) (Hot dipped galvanized upon request)

Ordering: Specify figure number, rod size, length, material, and finish.

Rod Size	Packaging Feet Per Bundle						Max. Rec. Load				Wt. Per Foot			
	6ft.		(1.83)		10ft.		(3.05)		12ft.		(3.66)		lbs.	kg
	lbs.	kN	lbs.	kN	lbs.	kN	lbs.	kN	lbs.	kN				
1/4-20	300	(91.44)	500	(152.4)	600	(182.88)	240	(1.07)	188	(0.84)	.12	(.05)		
3/8-16	150	(45.72)	250	(76.2)	240	(73.15)	730	(3.25)	572	(2.54)	.29	(.13)		
1/2-13	72	(21.95)	120	(36.58)	144	(43.90)	1350	(6.01)	1057	(4.70)	.54	(.25)		
5/8-11	48	(14.63)	80	(24.38)	96	(29.26)	2160	(9.61)	1692	(7.52)	.83	(.38)		
3/4-10	30	(9.14)	50	(15.24)	60	(18.29)	3230	(14.37)	2530	(11.25)	1.25	(.57)		
7/8-9	24	(7.32)	40	(12.19)	48	(14.63)	4480	(19.93)	3508	(15.61)	1.65	(.75)		
1-8	12	(3.66)	20	(6.10)	24	(7.32)	5900	(26.24)	4620	(20.55)	2.25	(1.02)		